



LOCK-N-LOAD™

ADJUSTABLE SUPPORT

- ◆ Adjustable without any cutting and is available in a variety of lengths to fit mining heights from 3 feet to 14 feet (1m to 4.2 m).
- ◆ Available in capacities of either 5 or 8 tons.
- ◆ Can be installed by one person and may be preloaded using the simple wrench that can be purchased with the unit. 2500 lbs(11kN) of preload can be applied.
- ◆ The Lock-N-Load™ can be removed and reused by releasing the clamps.
- ◆ The Lock-N-Load can be packaged with conventional cap blocks and header boards. In addition, various steel fittings are available to tie into steel or wooden beams.
- ◆ The Lock-N-Load can be applied in place of steel jacks, water props or posts as a temporary support. It can also be used as formwork for stoppings, seals, barricades and ventilation curtains.

LOCK-N-LOAD™

ADJUSTABLE SUPPORT



T HEAD

CHANNEL HEAD

For use in tying into a steel or wooden beam or stringer.

LOCK-N-LOAD SPECIFICATIONS


5 TON SUPPORT CAPACITY

PART #	CLOSED HEIGHT	OPEN HEIGHT	WEIGHT (LBS.)
Lock 5/3-5	3 ft.	5 ft.	19
Lock 5/4-6	4 ft.	6 ft.	24
Lock 5/5-7	5 ft.	7 ft.	28
Lock 5/6-8	6 ft.	8 ft.	33
Lock 5/7-9	7 ft.	9 ft.	38
Lock 5/8-10	8 ft.	10 ft.	42
Lock 5/10-12	10 ft.	12 ft.	51
Lock 5/12-14	12 ft.	14 ft.	60

8 TON SUPPORT CAPACITY

PART #	CLOSED HEIGHT	OPEN HEIGHT	WEIGHT (LBS.)
Lock 8/3-5	3 ft.	5 ft.	26
Lock 8/4-6	4 ft.	6 ft.	32
Lock 8/5-7	5 ft.	7 ft.	39
Lock 8/6-8	6 ft.	8 ft.	45
Lock 8/7-9	7 ft.	9 ft.	52
Lock 8/8-10	8 ft.	10 ft.	58
Lock 8/10-12	10 ft.	12 ft.	71
Lock 8/12-14	12 ft.	14 ft.	84

LOCK-N-LOAD PERFORMANCE

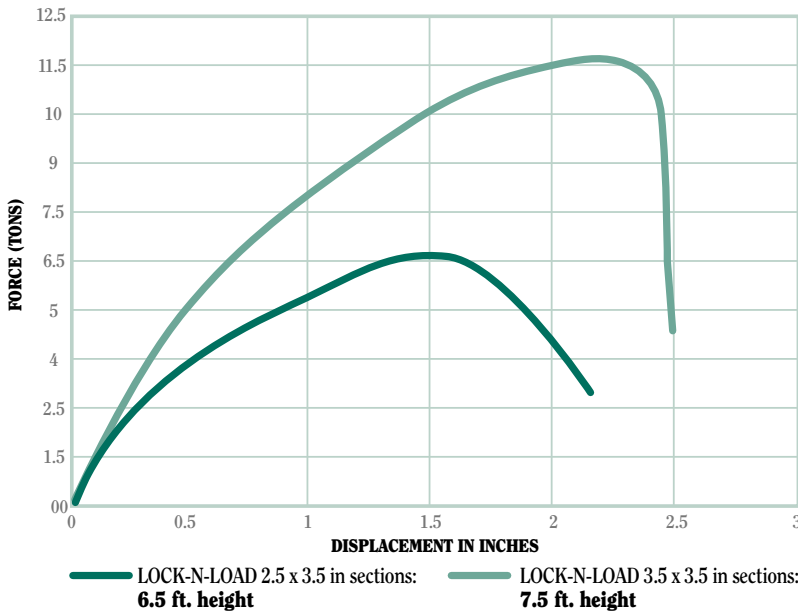

LOCK-N-LOAD APPLICATIONS

- ◆ Temporary support
- ◆ Support for ventilation curtain
- ◆ Formwork