

Soilax® DF.L

Ground conditioner for Tunnel Boring Machine Excavation

Soilax® DF.L is an agent designed specifically for neutralizing unwanted foam bubbles


TYPICAL APPLICATIONS

- Foam ground conditioners typically used for TBM tunneling sometimes cause unintentional bubbles in sumps and dewatering systems; Soilax DF.L is used to combat these unwanted bubbles
- Soilax DF.L may be sprayed over the affected area or added to sumps and tanks where affected water is stored

FEATURES AND BENEFITS

- Eliminates nuisance foam from areas, sumps, and tanks
- Perfect for use in conjunction with Soilax-S and Soilax-AC ground conditioners
- Suitable for use above and below ground anywhere nuisance foam is encountered
- Made in the USA
- Readily available
- Just-In-Time delivery possible
- Available in bulk trucks, totes, and drums

BORRAID

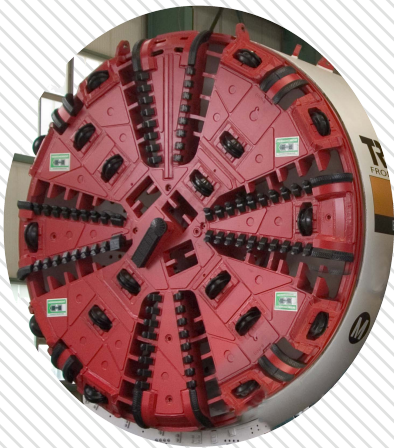

Characteristic	Value
Form	Liquid
Color	White Opaque Liquid
Density at 20°C	1.01 g/cm ³
Viscosity at 25°C	500 - 1100 cps
Freezing Point	0°C

Soilax® DF.L

GUIDELINES FOR USE

Application:

Soilax-DF.L can be used with surfactant-based ground conditioners such as Soilax-S and Soilax-AC to reduce unwanted bubbles.

Required Equipment:

Soilax-DF.L can be added directly to sumps and tank where affected water is stored, or can be sprayed over affected areas.

To prevent mixing of non-approved additives, it is recommended to use a dedicated pump and/or sprayer for Soilax-DF.L. If a single pump is used for more than one product, the pump should be thoroughly cleaned with water before switching to Soilax-DF.L.

STORAGE AND HANDLING

Temperature and Shelf Life:

Soilax-DF.L should be stored between 50°F and 95°F (10°C and 35°C). Do not allow product to freeze. If stored in the original tightly closed containers, Soilax-DF.L will have a shelf life of 12 months.

Safety

Standard precautions for handling chemical products should be observed. Avoid eye and skin contact; wear protective gloves and safety goggles. If contact occurs, rinse with water. In case of eye contact, seek medical advice. For further information refer to the Safety Data Sheet.

PACKAGING

Soilax-DF.L is available in bulk, totes, and drums.

RELATED DOCUMENTS

Safety Data Sheet.

ADDITIONAL INFORMATION

For additional information please contact your sales representative.

LIMITED WARRANTY NOTICE

BORAID® delivers products which conform with the technical properties stated on the applicable current Technical Data Sheet and with the

provisions of its quote, provided such products are contained or packaged in the manner required in the quote. EXCEPT AS SPECIFICALLY INDICATED IN THE FOREGOING SENTENCE, BORAID® NEITHER MAKES NOR SHALL BE DEEMED TO HAVE MADE ANY WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, CONCERNING THE PRODUCTS, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OR REPRESENTATION AS TO DESIGN, QUALITY, OR CONDITION OF THE PRODUCTS, OR AS TO THE MERCHANTABILITY OR FITNESS OF THE PRODUCTS FOR ANY PARTICULAR PURPOSE OR TO ANY OTHER MATTER RELATING TO THE PRODUCTS. BUYER AGREES THAT THE PRODUCTS ARE OF A KIND AND CAPACITY SELECTED BY BUYER AND THAT BUYER IS SATISFIED FOR ITS PURPOSES AND THAT BORAID® HAS MADE NO REPRESENTATION OR WARRANTY WITH RESPECT TO THE SUITABILITY OF THE PRODUCT FOR THE PURPOSES OR USES OF THE BUYER, OR ANY OTHER REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED WITH RESPECT THERETO. Buyer assumes all risks of whatever nature associated with the use of the Products and shall indemnify and hold harmless BORAID® from all costs of whatever nature arising from or related to the use of the Products. To the extent BORAID® personnel or technicians provide advice and consultation to Buyer, it shall be for information only, shall not alter either party's obligations hereunder in any way whatsoever, and shall not operate to create any liability on behalf of BORAID®. In addition to the foregoing limited warranty, in the event of a purchase of BORAID® products, the Terms & Conditions of Sale set forth apply.