

Camprop™

Re-useable Roof Support for Temporary Support


The Camprop™ is a re-useable temporary slope walling support unit that can be remotely removed. Its structure is manufactured from a two-steel tubing system which allows for efficient support to slope walling when prestressed using the cam mechanism.

ADVANTAGES

- Light weight and easy to install
- Re-usable with remote release
- No creep under static conditions
- Colour coded to identify ranges

NO.	COMPONENT NAME	DESCRIPTION
1	Swivel Head Board Tri-spreader OR Straight	Channel with Rubber Padding
2	Carrying Handles	10 mm Round Bar
3	Pin	16mm High tensile steel
4	Corrosion indicator	0.8mm steel ring
5	Outer Tube	88.9 x 3.5mm
6	Inner Tube	76.2 x 3.5 mm
7	Cam follower	16mm Plate
8	Cam	10mm Plate
9	Cam pin	20mm High tensile steel
10	Pre-stress handle	750mm length
11	Net Hook	16mm Round bar



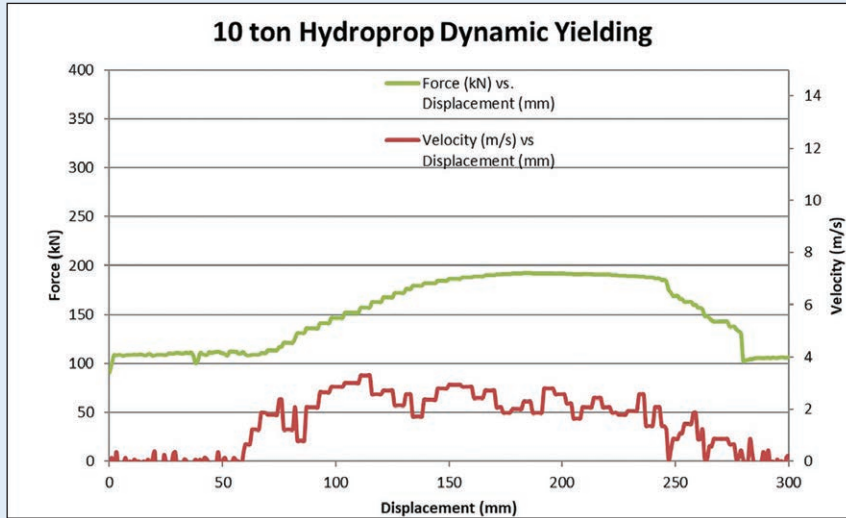

ITEM	MINIMUM HEIGHT	(M) MAXIMUM HEIGHT	(M) WEIGHT APPROX. (KG)
CP0710	0,7	1,05	16,5
CP0913	0,9	1,35	19,5
CP1015	1,0	1,5	20
CP1117	1,1	1,7	21
CP1321	1,3	2,15	25,5
CP1626	1,6	2,65	29
CP2133	2,1	3,3	35
CP2638	2,6	3,8	39
CP2941	2,9	4,1	42
CP3648	3,6	4,85	48

NEW SOUTH WALES

Unit 3, 52 Riverside Drive
Mayfield West, NSW 2304
Tel: +61 1300 054 469
Email: info@strataproducts.com.au

WESTERN AUSTRALIA

Level 7, 191 St Georges Terrace
Perth, WA, 6000

QUEENSLAND

65 Crichtons Road
(RCOE Building)
Paget, Mackay, Qld 4740