

/strata geotech

Strata Sand Prop™


Fast, Easy Installation

The Sand Prop™ is a compact, self-contained high-capacity prop designed to be easily installed.

- · Sand Prop has a capacity of 60 tons
- Can provide up to 2 inches of deformation before buckling
- Available in lengths from 4 to 9 feet
- · Each unit has 2 feet of height adjustment
- The ease of installation allows for quick placement and less labor requirements, which in turn increases productivity
- Can be reused by removing the wedges and recharging the sand into the upper unit. Do not remove under load
- A variety of headplate and footplate designs are available for special applications

FEATURES & BENEFITS

- Lightweight
- One person installation
- · High capacity
- Low cost
- · No power tools required

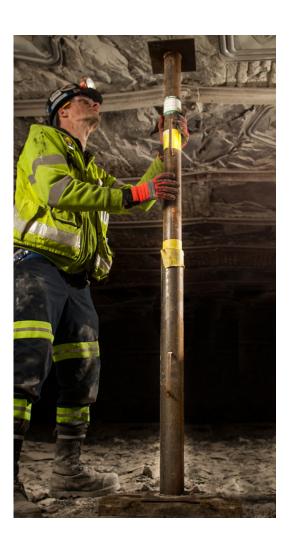


Fast, Easy Installation

APPLICATIONS


- · Tailgate and bleeder support
- · X-Cut and intersection stabilization
- Belt line entry support
- · Longwall shield recovery

PRODUCT Code	HEIGHT RANGE LOAD Closed Open WEIGHT			
SAND4-6	60 tons	4 ft.	6 ft.	83 lbs.
SAND5-7	60 tons	5 ft.	7 ft.	91 lbs.
SAND6-8	60 tons	6 ft.	8 ft.	99 lbs.
SAND7-9	60 tons	7 ft.	9 ft.	105 lbs.
SAND9-12	60 tons	9 ft.	12 ft.	137 lbs.





SAND PROP™ Performance

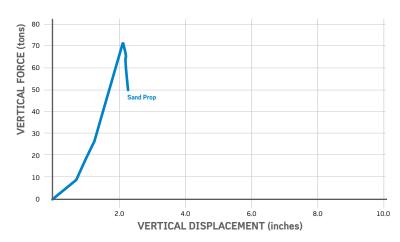



USA

8800 Roswell Road, Suite 145 Sandy Springs, GA 30350 USA TF: 800-691-6601 T: 770-321-2500 T: 724-745-5030 info@strataworldwide.com

CANADA

Ontario North Bay, Ontario Canada Tel: (705) 978 2304